

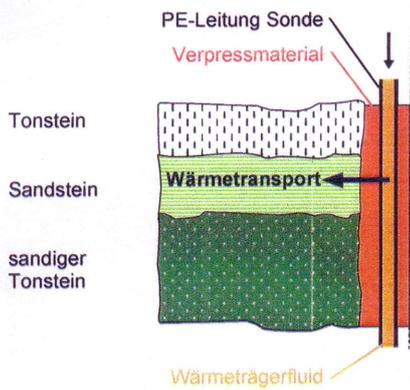


mit üblichen VM verpresst, z.B. bentonithaltiger Baustellenmischung VDI 4640

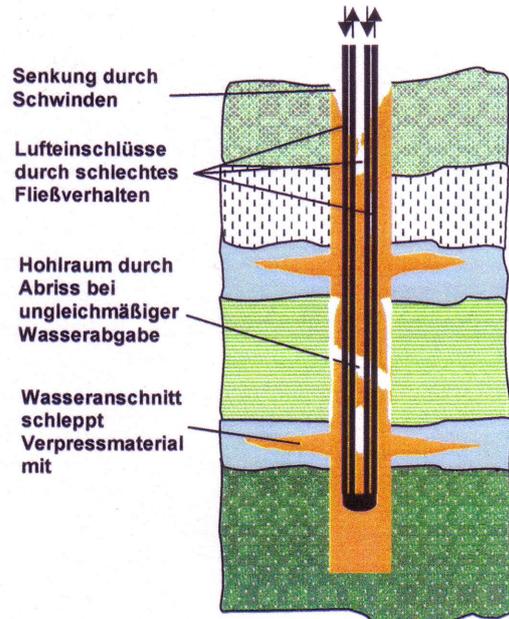

λ Gestein	λ Verpress- material	λ PE
z.B. 2,3 W/(mK)	ca. 2 W/(mK)	0,38 W/(mK)

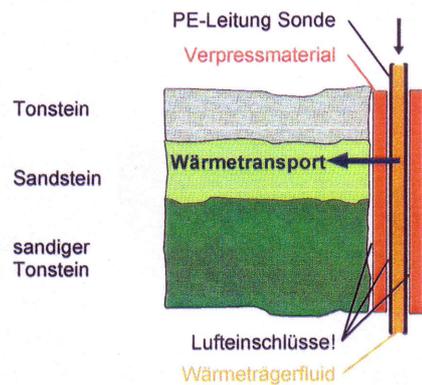

λ Gestein	λ Luft	λ Verpress- material	λ Luft	λ PE
z.B. 2,3 W/(mK)	0,02 W/(mK)	ca. 2 W/(mK)	0,02 W/(mK)	0,38 W/(mK)

